

Test, monitor and analyse your electrical power, even on disturbed networks (AC+DC)

**DC and AC (~) single and
three-phase balanced**

1 kA AC/DC / 1.5 kA peak

600 V AC/DC / 1.5 kV peak

600 kW AC/DC, VA or var

**Harmonics up to
the 25th order**

*Other model: F 23
for AC networks*



IEC 1010-2-032. 600 V Cat III

Perfectly designed for maintenance and monitoring of electrical installations (AC + DC). This worksite tool, easy to handle and simple to use, offers rapid analysis of your power measurements and disturbances.

- Large display with backlighting. Simultaneous reading of 3 values (3 x 10 000 counts)
- True RMS voltage and current in AC, AC + DC or DC mode
- Wattmeter: power factor and displacement power factor
- Harmonic Distorsion order by order
- Measurements on transformers: K and CBEMA* factors
- RS 232 optical output and software for printing or processing on PC

** Derating factor of a transformer as a function of harmonic distortion*

2 models for your power and harmonic measurements			
Measurements		F23	F27
Currents and voltages (True RMS)	AC	●	●
	AC+DC		●
	DC ⁽¹⁾		●
Ripple rate			●
Peak and smoothed values		●	●
Crest factor		●	●
Frequency		●	●
Active, reactive and apparent power (balanced single-phase and 3-phase currents)	AC	●	●
	AC+DC		●
	DC ⁽¹⁾		●
Power factor		●	●
Displacement power factor		●	●
K and CBEMA [®] factors			●
Total Harmonic Distorsion		●	●
Harmonic distorsion order by order			●
Optical RS 232 output and software ⁽³⁾			●

(1) Auto zero adjustment on DC

(2) Derating factor of a transformer as a function of harmonic distorsion

(3) For recording and processing the results on a PC


Specifications of the F27 clamp	
Three-function display	3 x 10 000 counts
Current (True RMS)	300 mA...1000 AAC/DC (1500 A peak)
Clamping	cable Ø 50 mm or busbar 80 x 5 mm
Voltage (True RMS)	50 mV...600 V AC/DC (1500 V peak)
Peak value (PEAK)	PEAK "+" or "-" (2 ms)
Crest factor (CF)	1 ... 10
Ripple rate (RIPPLE)	2 % ... 1000 %
Frequency	0.5 Hz ... 20 kHz
Active power	10 W ... 600 kW AC/DC
Reactive power	10 var ... 600 kvar AC/DC
Apparent power	10 VA ... 600 kVA AC/DC
Power factor (PF)	0 ... 1
Displacement power factor (DPF)	-1 ... +1
K factor (KF)	1 ... 30
CBEMA factor (THDF)	0.2 ... 1
Total Harmonic Distorsion or order by order to the 25th	absolute value (A or V) or relative value (%) of THD and DF
Total Harmonic Distorsion (THD)	0.2 ... 600 %
Distorsion factor (DF)	0.2 ... 100 %
Record (RECORD)	min, max and average value
Smoothed value (SMOOTH)	over 3 s
Display hold (HOLD)	available for every function
Monitoring (SCAN mode)	programmable rate: 1 to 60 min.
RS 232 optical output	configurable (PRGM function)

To order

F 27 clamp	P01.1207.57
• Shipped in a carrying case with a set of 2 leads with prods, 2 voltages leads, 2 crocodile clips, a RS 232 optical output adapter and software, 4 batteries 1.5V, a mini reference guide and a user manual.	
Spares	
• Set of 2 leads n°181 A/B	P01.2950.84
• Set of 2 crocodile clips IEC 1010	P01.1018.14
• Set of 4 batteries 1.5V (LR6)	P01.1007.59
• Carrying case MLT 101	P01.2980.17
• CA transfert 2 software	P01.1019.08A

Your distributor

The F27 clamp-on ammeter is shipped in a carrying case with leads and crocodile clips, RS 232 output adapter and software operating under Windows.

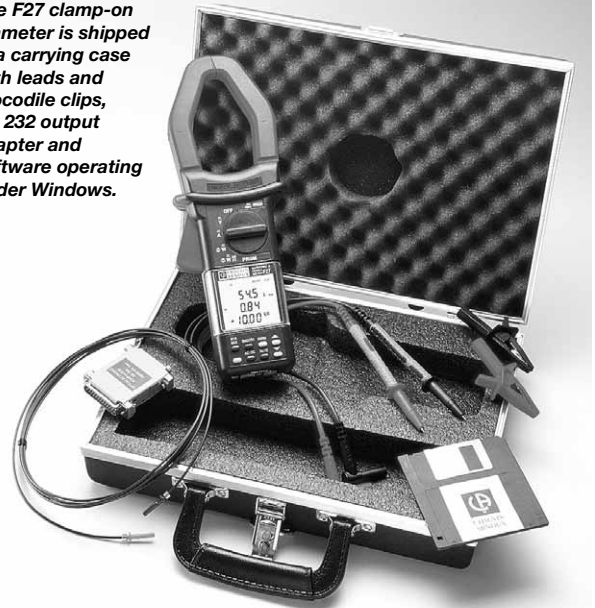

Electrical safety

- Conforms to IEC 1010-1 standards
 - double insulation
 - installation category III
 - Degree of pollution 2
 - service voltage 600 V

Conformity with other international standards

- EMC (to IEC 1000-4)
- Resistance to drops, shocks, vibrations (IEC 68.2)
- Watertightness: protection index IP 40 (to IEC 529)

Power supply

- 4 alkaline batteries 1.5 V (type LR6)
- Battery life: 40 hours
(battery status indicated on the display)
- Low battery indicator

Climatic conditions

- Operating temperature: -10°C to +55°C
- Relative humidity: 0 to 90 % RH to 40°C
- Storage temperature: -40°C to +70°C

Dimensions and weight

- Clamp: 275 x 103 x 50 mm - 670 g with the batteries
- Carrying case: 320 x 250 x 90 mm - 770 g

FRANCE
Chauvin Arnoux
190, rue Championnet
75876 PARIS Cedex 18
Tel: +33 1 44 85 44 86
Fax: +33 1 46 27 95 59
export@chauvin-arnoux.fr
www.chauvin-arnoux.fr

UNITED KINGDOM
Chauvin Arnoux Ltd
Waldeck House - Waldeck Road
MAIDENHEAD SL6 8BR
Tel: +44 1628 788 888
Fax: +44 1628 628 099
info@chauvin-arnoux.co.uk
www.chauvin-arnoux.co.uk

MIDDLE EAST
Chauvin Arnoux Middle East
P.O. BOX 60-154
1241 2020 JAL EL DIB (Beirut)
Tel: +961 1 890 425
Fax: +961 1 890 424
camie@chauvin-arnoux.com
www.chauvin-arnoux.com

 **CHAUVIN
ARNOUX**
GROUP